



BM60LS01M SIZE:600X600x10MM/24"X24" Process:Mould Matte




BM60LS02M SIZE:600X600x10MM/24"X24" Process: Mould Matte



BM60LS03M SIZE:600X600x10MM/24"X24" Process: Mould Matte




BM60LS04M SIZE:600X600x10MM/24"X24" Process: Mould Matte

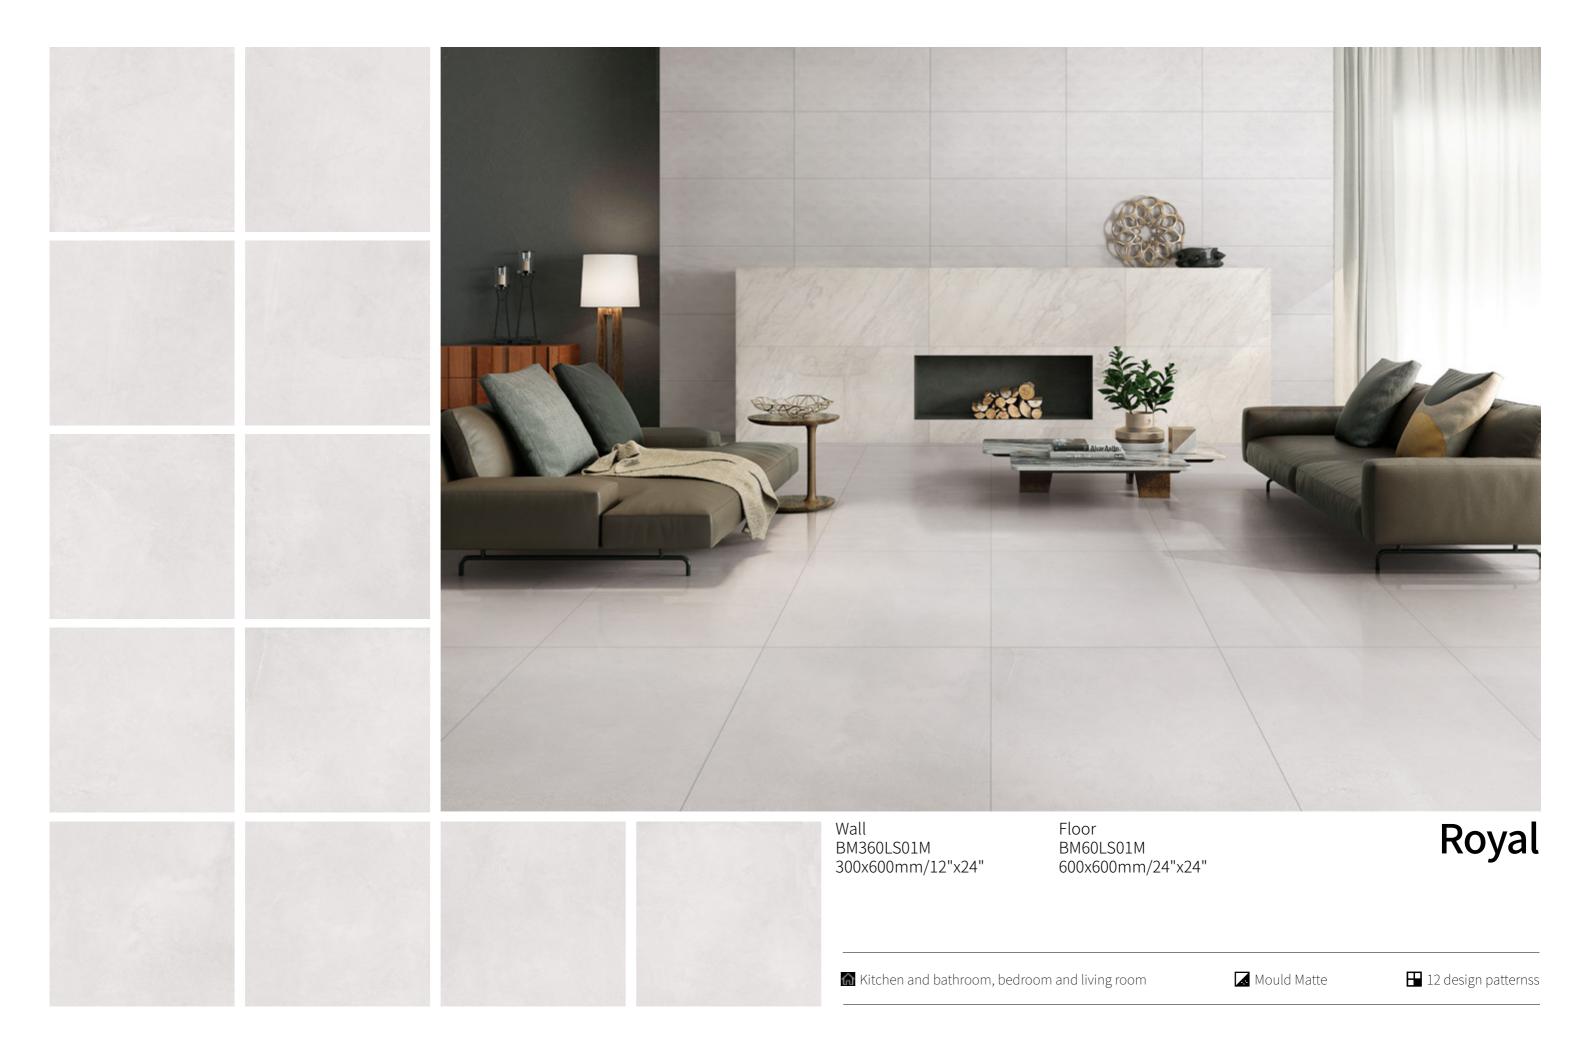





Royal

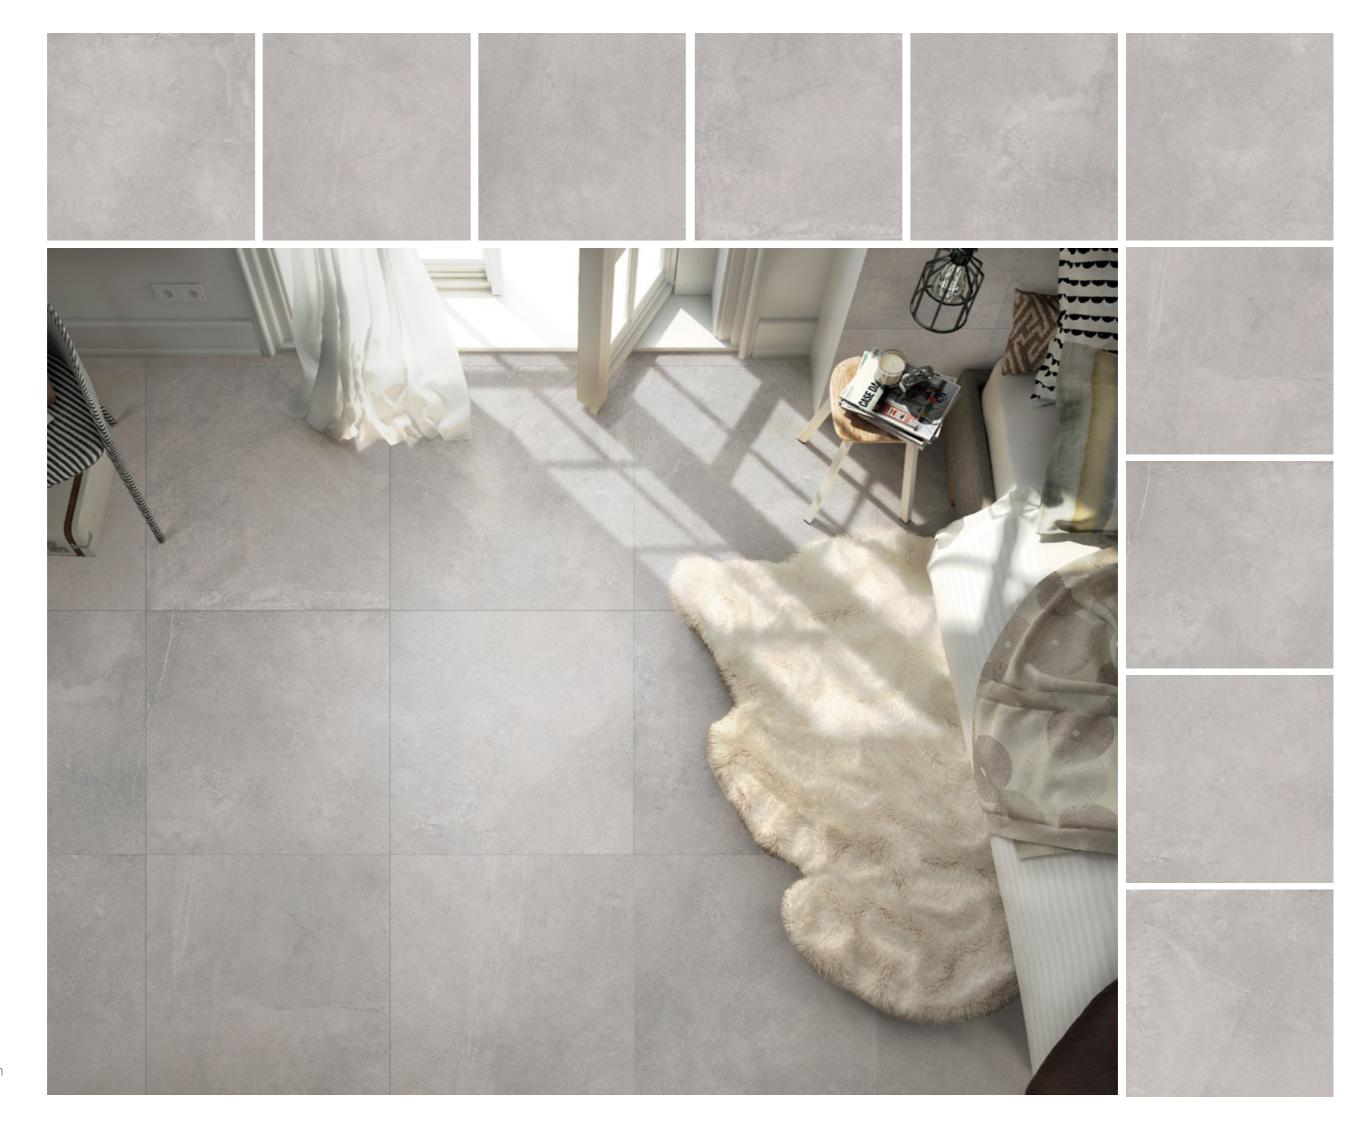


Floor BM60LS03M 600x600mm/24"x24"

Mould Matte

Mitchen and bathroom, bedroom and living room

MODEL:BM60LS04M SIZE:600X600X10MM/24"X24"

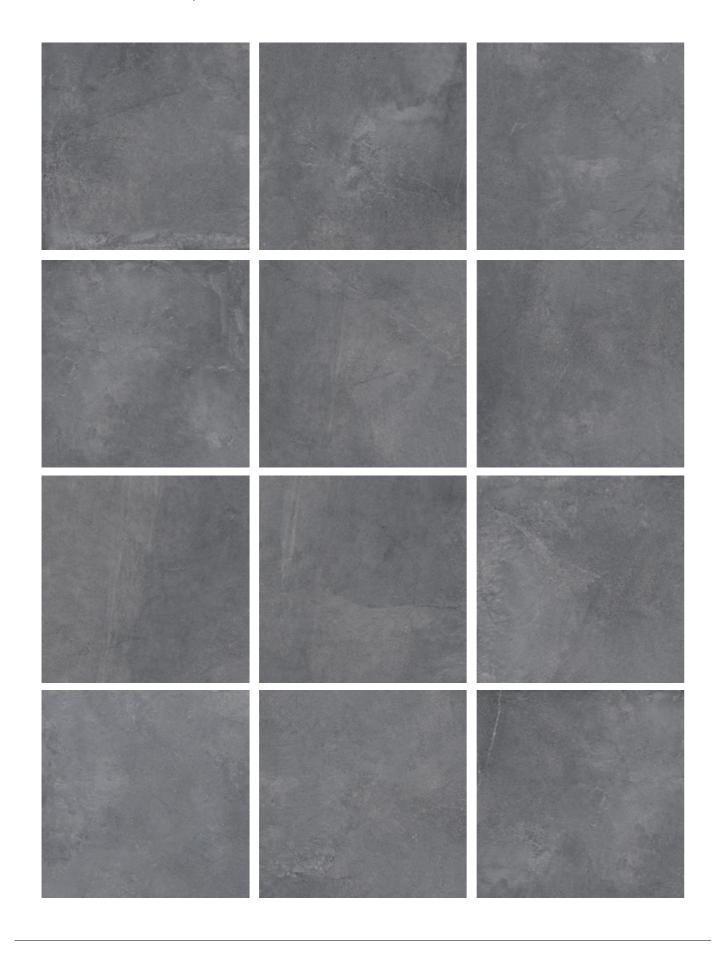





TECHNICAL PARAMETERS

		欧洲标准 EU NORM	国家标准 PRC NORM	产品性能 PRODUCT PERFORMANCE	
	长度偏差 LENGTH	±0.6	±0.5%	±0.5%	
	宽度偏差 WIDTH	±0.6	±0.5%	±0.5%	
	厚度偏差 THICKNESS	±0.5	± 5%	±5%	
	表面平整度 SURFACE FLATNESS	±0.5	± 0.4%	± 0.4%	
	边直度 STRAIGHTNESS OF SIDES	±0.5	± 0.3%	±0.3%	
	直角度 RECTANGULARITY	±0.6	±0.5%	±0.5%	
•	吸水率 WATER ABSORPTION	平均值≤0.5% 单个值≤0.6% E≤0.5% individual Maximum 0.6%	平均值≤0.5% Average≤0.5% 单个值≤0.6% Individual 0.6%	平均值≤0.5% Average≤0.5%	
•	破坏强度 BREAKING STRENGTH	≥1300N	≥1300N	≥1300N	
•	断裂模数 MODULUS OF RUPTURE	≥35N/mm2	≥35Mpa	≥35Mpa	
	抗污性 STAIN RESISTANCE	EN187: A级,最低值B值 EN187: Class A Minimum Grade B	≥GB等级 ≥Grade B	Pass	
*	耐磨度 ABRASION RESISTANCE	≤175mm3	耐磨性报告磨损等级和转数 Report the Attrition Grade Turnover Number	Pass	
**	抗冻性 FROST RESISTANCE	至少100次冻融循环不出现裂纹 (-5°C-5°C) No Crack at Freeze-Thaw Cycles for 100 Times(-5°C-5°C)	经抗冻性试验后应无裂纹或剥落 No Cracks Or Exfoliation After testing	Pass	

PACKING DETAILS

SERIES	SIZE	PCS/CTN	SQM/CTN	KG/CTN	CTNS/PALLET	SQM/PALLET	KG/PALLET
ROYAL	600X600mm 24"X24"	4	1.44	31.5	40	57.6	1280